

Fire Rated Connectors

American Connectors

North American-Standard
Fire Rated Stainless Steel
WSE

PER FIT

For Use:

- Fire Rated Systems
- Indoor & Outdoor Locations
- Rockbestos Vitalink MC Fire Rated Cable
- NEMA 4x Stainless Steel Enclosures
- Emergency Transit lighting, communications, ventilation
- Emergency Fire Pumps
- Emergency Feeder Applications


Listing & Compliances:

- FHIT 120
- E107930
- E343634
- UL MC Cable Fitting Standard 514B
- UL Rain Tight
- UL 541B, UL 467
- UL 2196 (2 Hr, Circuit integrity test)
- UL Tested with RSSC Fire Rated System 120
- NEMA 4 & IP56
- NEMA 6P (Through 2-1/2")

Features:

- 360° Hand-tight Grounding
- High Pull Out Resistance
- Environmentally Friendly
- Includes Double Locknuts, Earthtag, & Gasket
- Standard Stock: 303 Stainless Steel


WSE

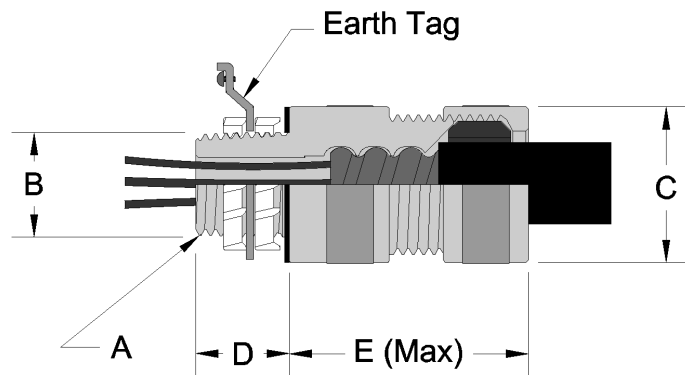

Part Number	Trade Size (NPT)	NPT Thread O.D.	Stock Dia.	NPT Thread Length	Outer Part Length	Overall Length
WSE	A	B	C	D	E	D+E
xxx-050	1/2"	0.84	1.25	0.78	1.42	2.2
xxx-075	3/4"	1.05	1.50	0.78	1.62	2.4
xxx-100	1"	1.32	2.00	0.99	1.72	2.7
xxx-125	1 1/4"	1.66	2.13	1.01	1.89	2.9
xxx-150	1 1/2"	1.90	2.50	1.03	2.38	3.4
xxx-200	2"	2.38	3.00	1.06	2.84	3.9
xxx-250	2 1/2"	2.88	3.75	1.57	3.23	4.8
xxx-300	3"	3.50	4.50	1.63	3.37	5.0
xxx-350	3 1/2"	4.00	5.00	1.68	3.42	5.1
xxx-400	4"	4.50	6.00	1.75	3.55	5.3

Part Numbering System

WSE XXX-YYY =

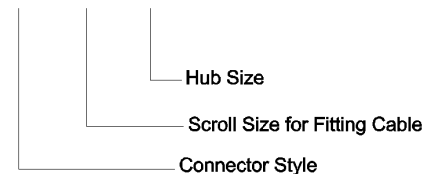

Markings

Example of Marking:

Perfit WT 111-100 S3 