

Dry Locations

North American-Standard
Fittings for Dry Locations
NWT, NWTU

American Connectors

For Use:



- Metal Clad (MC, MCC, MCI, MCI-A) Cable, Teck, Interlocked, & CCW
- NWTU used for Threaded Entrances
- NWT used for Non Threaded Entrances
- Indoor & Concrete Tight when taped

Listing & Compliances:

- UL Listing: E107930
- UL Standard: 514B

Features:

- 360° Hand-tight Grounding
- High Pull Out Resistance
- Environmentally Friendly
- Standard Stock: 6061 Aluminum
- Special Materials: Brass, Stainless Steel

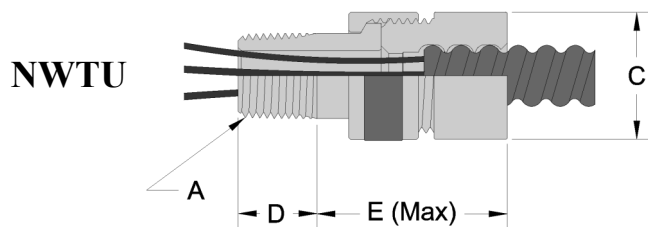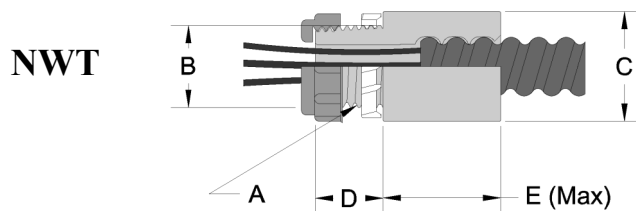

Markings

Example of Marking:

Perfit NWT 111-100 

Part Numbering System

NWTU XXX-YYY F xx =

Material Type
Fine Scroll*
Hub Size
Scroll Size for Fitting Cable
Connector Style

*Fine Scroll Only applies to parts over 2 1/2"

Part Number	Trade Size (NPT)	NPT Thread O.D.	NPT Thread Length	NWT			NWTU		
				Stock Dia.	Outer Part Length	Overall Length	Stock Dia.	Outer Part Length	Overall Length
NWT	A	B	D	C	E	D+E	F	H	H+D
xxx-050	1/2"	0.84	0.78	1.125	1.12	1.90	1.25	1.82	2.6
xxx-075	3/4"	1.05	0.78	1.250	1.17	1.95	1.50	2.02	2.8
xxx-100	1"	1.32	0.99	1.625	1.21	2.19	2.00	2.12	3.1
xxx-125	1 1/4"	1.66	1.01	1.875	1.46	2.47	2.13	2.39	3.4
xxx-150	1 1/2"	1.90	1.03	2.250	1.93	2.95	2.50	3.08	4.1
xxx-200	2"	2.38	1.06	2.625	2.15	3.21	3.00	3.54	4.6
xxx-250	2 1/2"	2.88	1.57	3.250	2.51	4.08	3.75	4.23	5.8
xxx-300	3"	3.50	1.63	4.000	2.51	4.14	4.50	4.27	5.9
xxx-350	3 1/2"	4.00	1.68	4.500	2.88	4.56	5.00	4.62	6.3
xxx-400	4"	4.50	1.75	5.000	2.85	4.60	6.00	4.65	6.4