

Wet Locations

North American-Standard Fittings for Wet Locations WT, WTU

American Connectors

For Use:

- Metal Clad (MC, MCC, MCI, MCI-A) Cable, Teck, Interlocked, & CCW
- WTU used for Threaded Entrances
- WT used for Non Threaded Entrances
- Outdoor & Indoor Locations


Listing & Compliances:

- UL Listing: E107930
- UL Standard: 514B
- UL Rain Tight
- NEMA 4 & IP54
- NEMA 6P*


Features:

- 360° Hand-tight Grounding
- High Pull Out Resistance
- Environmentally Friendly
- Standard Stock: 6061 Aluminum
- Special Materials: Brass, Stainless Steel

WT

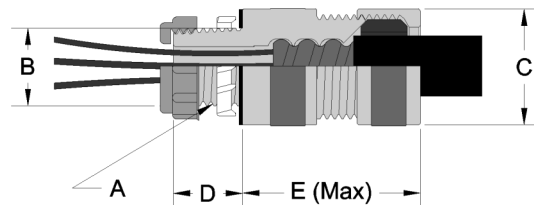


WTU

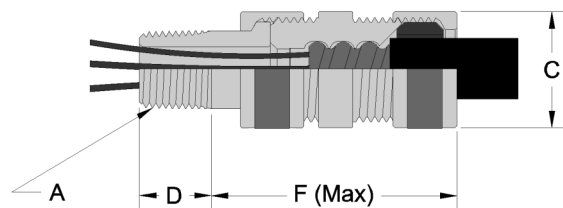

Part Number	Trade Size (NPT)	NPT Thread O.D.	Stock Dia.	NPT Thread Length	WT		WTU	
					Outer Part Length	Overall Length	Outer Part Length	Overall Length
WT/WTU	A	B	C	D	E	D+E	F	D+F
xxx-050	1/2"	0.84	1.25	0.78	1.42	2.2	2.87	3.7
xxx-075	3/4"	1.05	1.50	0.78	1.62	2.4	2.98	3.8
xxx-100	1"	1.32	2.00	0.99	1.72	2.7	3.43	4.4
xxx-125	1 1/4"	1.66	2.13	1.01	1.89	2.9	3.55	4.6
xxx-150	1 1/2"	1.90	2.50	1.03	2.38	3.4	4.29	5.3
xxx-200	2"	2.38	3.00	1.06	2.84	3.9	5.08	6.1
xxx-250	2 1/2"	2.88	3.75	1.57	3.23	4.8	5.80	7.4
xxx-300	3"	3.50	4.50	1.63	3.37	5.0	5.79	7.4
xxx-350	3 1/2"	4.00	5.00	1.68	3.42	5.1	6.20	7.9
xxx-400	4"	4.50	6.00	1.75	3.55	5.3	6.36	8.1

Part Numbering System

WT XXX-YYY F xx =

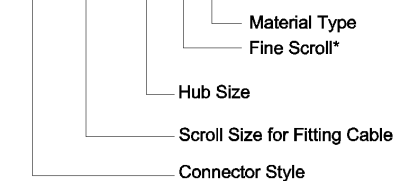

*Fine Scroll Only applies to parts over 2 1/2"

Markings

Example of Marking:

Perfit WTU 111-100 S3 cULus